


Unit 19, 1610 Derwent  
Way  
Delta BC V3M 6W1  
Canada  
+1 888-303-3278

Estimate Date: 08/21/2026  
Sales Order: S06368

<https://vancouvericf.com>

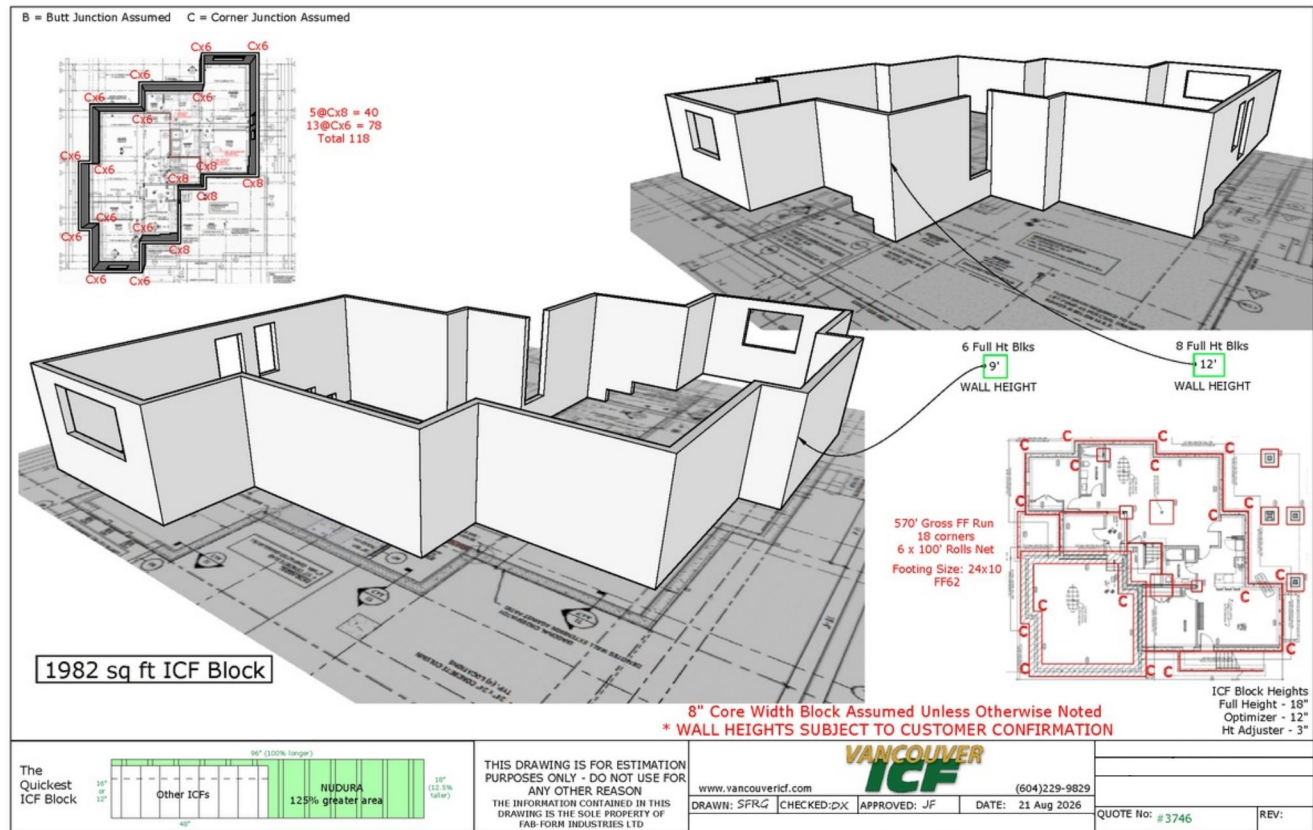

[Open Full Drawing \(PDF\)](#)

Project specifications

Concrete volume walls estimate: 37.42 m<sup>3</sup>  
Concrete volume footings estimate: 26.90 m<sup>3</sup>  
Concrete volume total estimate: 64.32 m<sup>3</sup>  
Net area of ICF walls: 1,982.00 ft<sup>2</sup>  
% of wall area covered by Peel & Stick: 110 %  
Length of delivery van (8' x 8'): 19.31

ICF wall details

| Height, ft | Length, ft |
|------------|------------|
| 12.0       | 45.0       |
| 10.5       | 6.0        |
| 9.0        | 166.0      |
| Perimeter: | 217.0      |

Wood requirements

Strongbacks 27 pcs / 12 ft  
Strongbacks 30 pcs / 10 ft  
Kickers 27 pcs / 10 ft  
Kickers 2 pcs / 9 ft  
Kickers 31 pcs / 7 ft  
Walers 47 pcs / 16 ft  
Handrail Post 60 pcs / 4 ft

| Code                     | Description                                                                                                  | Qty    | Price  | Amount       |
|--------------------------|--------------------------------------------------------------------------------------------------------------|--------|--------|--------------|
| Insulated Concrete Forms |                                                                                                              |        |        |              |
| <a href="#">90-8</a>     | 8" 90 corner, 6 ft2                                                                                          | 118.00 | 42.55  | \$ 5,020.90  |
| <a href="#">96-8</a>     | 8" standard form, 8' x 18", 12 ft2                                                                           | 119.00 | 81.92  | \$ 9,748.48  |
| Subtotal                 |                                                                                                              |        |        | \$ 14,769.38 |
| ICF Accessories          |                                                                                                              |        |        |              |
| AF-GT                    | Metal foam glue gun, Teflon coated for easy cleaning                                                         | 2.00   | 35.00  | \$ 70.00     |
| BUCK-8                   | 8" buck, 10 bucks per bag, bag size: 49" x 14" x 23", 30 lbs/bag.                                            | 10.00  | 29.70  | \$ 297.00    |
| CL-VJH-200-N2            | VJH, 200 per box, 12.55 lbs/box, box price - No returns for open boxes                                       | 2.00   | 155.46 | \$ 310.92    |
| EF-24                    | Ecofoam non expansive foam adhesive, 24 oz.                                                                  | 12.00  | 15.81  | \$ 189.72    |
| SC-2.5                   | #10 x 2.5" Hex Head Screw Steel Flat Washer 1000 screws, two drivers per pail. No returns for open boxes     | 2.00   | 191.68 | \$ 383.36    |
| WPRIME-19L               | Primer designed for use with Nudura's Peel & Stick membrane. 19L pail, coverage approximately 1,000 ft/pail. | 3.00   | 296.98 | \$ 890.94    |
| WPROF                    | Nudura waterproofing, winter grade, 75' x 3', 225 ft2 gross, 210 ft2 net, 44 lbs/roll.                       | 12.00  | 225.24 | \$ 2,702.88  |
| Subtotal                 |                                                                                                              |        |        | \$ 4,844.82  |
| Rental Materials         |                                                                                                              |        |        |              |
| USED Lo Zote             | For carrying 10 used Zuckles                                                                                 | 8.00   | 4.36   | \$ 34.88     |
| USED ZAT                 | Zat catwalk bracket, used                                                                                    | 40.00  | 5.23   | \$ 209.20    |
| USED Zeveler             | 1 pair of Zeveler bracket, used, no Lo Zote, no 6mm drivers                                                  | 54.00  | 3.11   | \$ 167.94    |
| USED Zont                | Zont waler bracket, used                                                                                     | 140.00 | 3.11   | \$ 435.40    |
| USED Zote                | For holding 20 used Zont brackets                                                                            | 7.00   | 4.73   | \$ 33.11     |
| USED Zuckle              | Zuckle wall aligner used                                                                                     | 50.00  | 4.36   | \$ 218.00    |
| Subtotal                 |                                                                                                              |        |        | \$ 1,098.53  |
| Fastfoot Footing Form    |                                                                                                              |        |        |              |
| Fastfoot Corner (62")    | Pre-Sewn FastFoot Corners                                                                                    | 18.00  | 9.84   | \$ 177.12    |
| Fastfoot (62"-100')      | Footing Form on a Roll - 100' long                                                                           | 5.00   | 104.15 | \$ 520.75    |
| Subtotal                 |                                                                                                              |        |        | \$ 697.87    |
| Delivery Services        |                                                                                                              |        |        |              |
| VICF Customer Delivery   |                                                                                                              | 6.00   | 105.00 | \$ 630.00    |
| Subtotal                 |                                                                                                              |        |        | \$ 630.00    |


Untaxed Amount: \$ 22,040.60  
Taxes: \$ 1,532.87  
Total: \$ 23,573.47

Restocking charges



AAA = blocks wrapped in polywrap, no damages: 0.0%  
AA = blocks without poly, no damages: 15.0%  
A = blocks without poly, damaged corners, soiled: 30.0%  
Cut blocks, heavily damaged: 100.0%

Terms & Conditions: <https://shop.fab-form.com/terms>

B = Butt Junction Assumed    C = Corner Junction Assumed

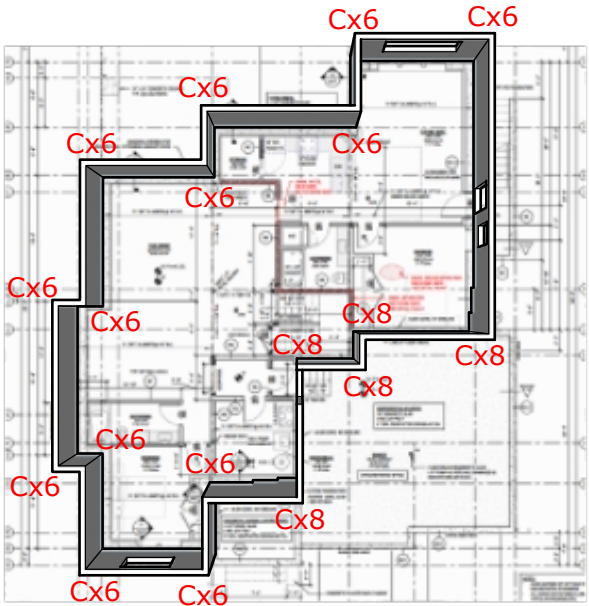

5@Cx8 = 40  
13@Cx6 = 78  
Total 118

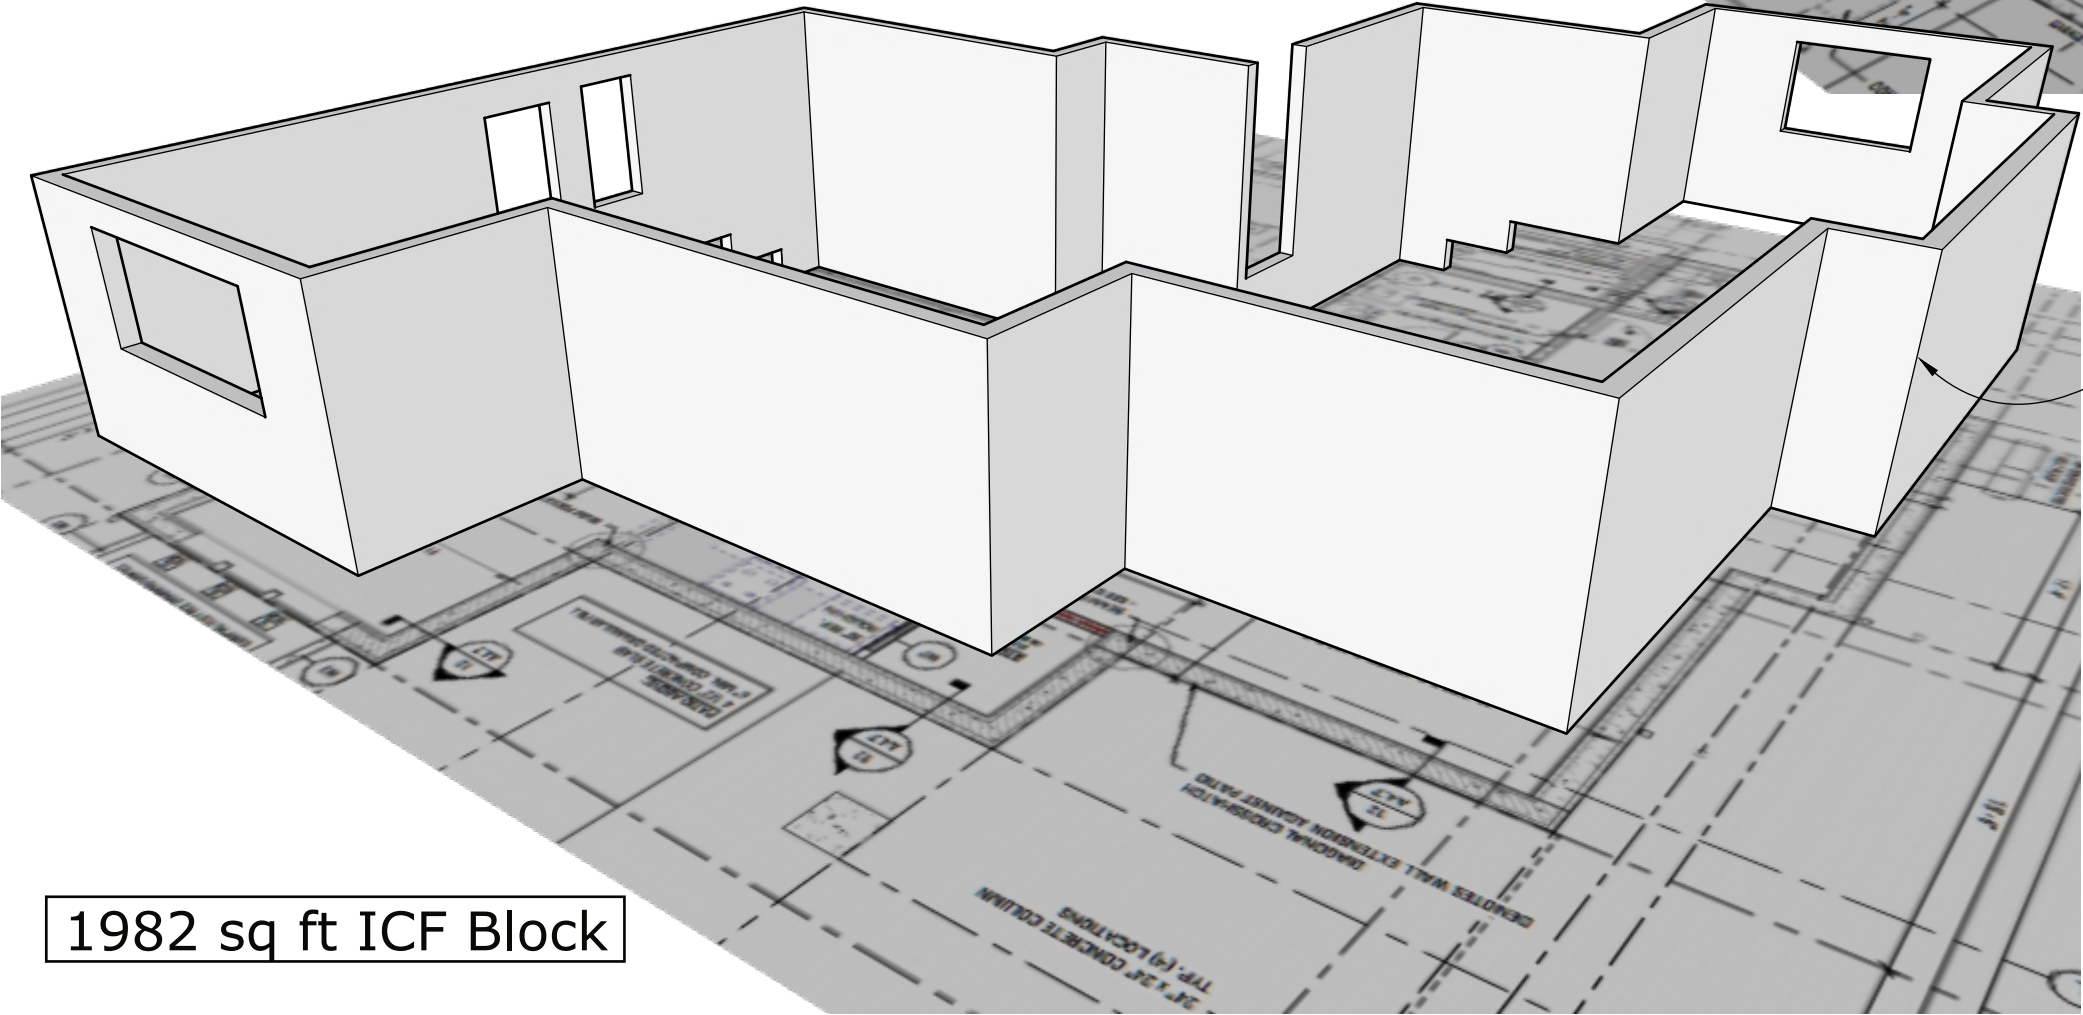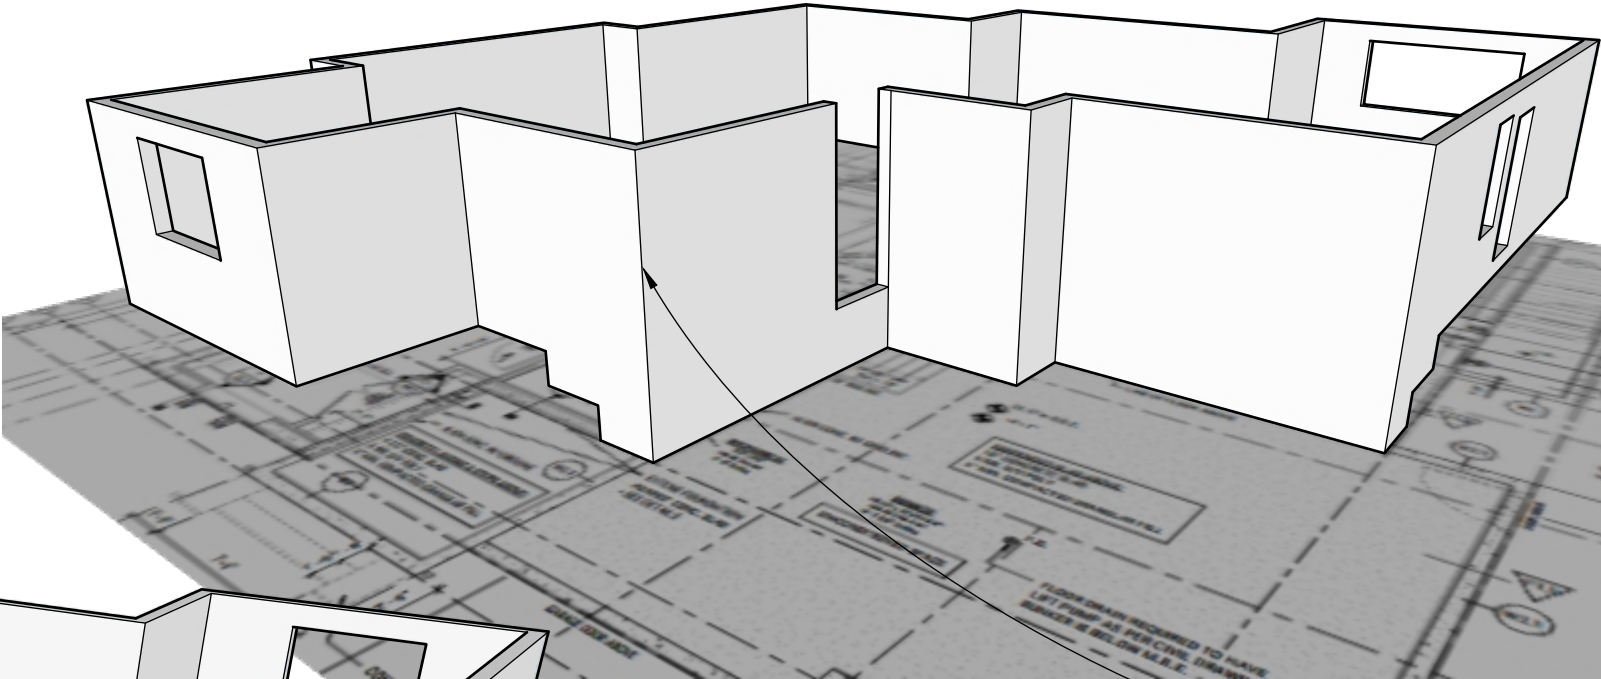


1982 sq ft ICF Block

6 Full Ht Blks  
9'  
WALL HEIGHT

8 Full Ht Blks  
12'  
WALL HEIGHT


570' Gross FF Run  
18 corners  
6 x 100' Rolls Net  
Footing Size: 24x10  
FF62

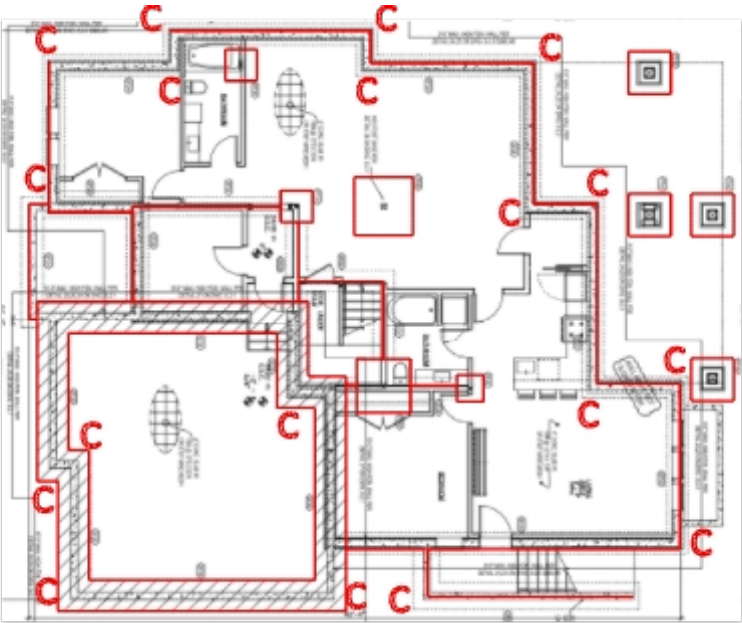

ICF Block Heights  
Full Height - 18"  
Optimizer - 12"  
Ht Adjuster - 3"

8" Core Width Block Assumed Unless Otherwise Noted  
\* WALL HEIGHTS SUBJECT TO CUSTOMER CONFIRMATION

The Quickest ICF Block

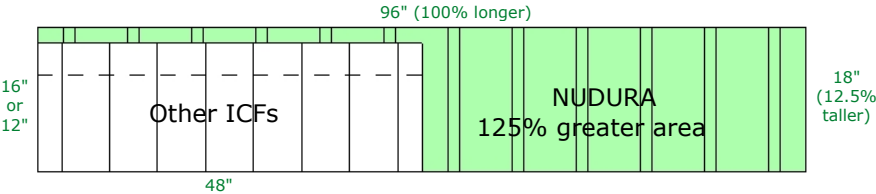

THIS DRAWING IS FOR ESTIMATION PURPOSES ONLY - DO NOT USE FOR ANY OTHER REASON  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FAB-FORM INDUSTRIES LTD



www.vancouvericf.com (604)229-9829  
DRAWN: SFRG CHECKED:DX APPROVED: JF DATE: 21 Aug 2026  
REF: View 10002 Trillium Way Rosedale

CONTACT: Tyler O'Connell  
co: Tyhol Construction  
SITE: 10002 Trillium Way Rosedale  
QUOTE No: #3746 REV: